

Share One Broadband Connection for Multiple PCs and Ethernet Devices




- Features Fast Ethernet LAN ports for downloading large files
- Combines router, double firewall, and 4-port Ethernet switch

Features

- Connect all computers on your home network to a single broadband connection
- Double firewall protection
- Ultra-fast LAN ports
- Easy installation

Double Firewall Security


NETGEAR helps shield your network and admits only legitimate traffic by combining two proven standards: NAT and SPI.

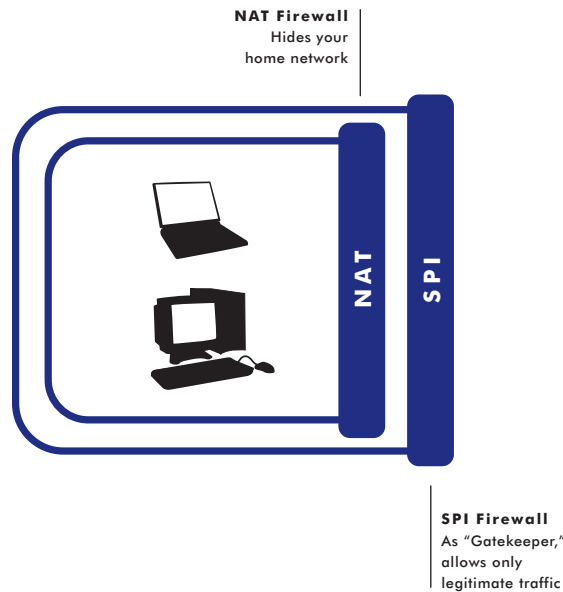

† Maximum wireless signal rate derived from IEEE standard 802.11 specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. NETGEAR makes no express or implied representations or warranties about this product's compatibility with any future standards, including 802.11n.

Open Source for Linux developers

NETGEAR's Web Safe Router is the perfect solution for sharing one broadband connection for all computers or Ethernet devices on your home network. The router also features double firewall protection that helps shield the network with two security methods—Network Address Translation (NAT) and Stateful Packet Inspection (SPI). Ultra-fast LAN ports distribute high-quality digital movies, photos, and MP3s at speeds up to 200 Mbps**. Installation is a snap, thanks to a unique setup CD that automatically detects and configures all necessary settings.

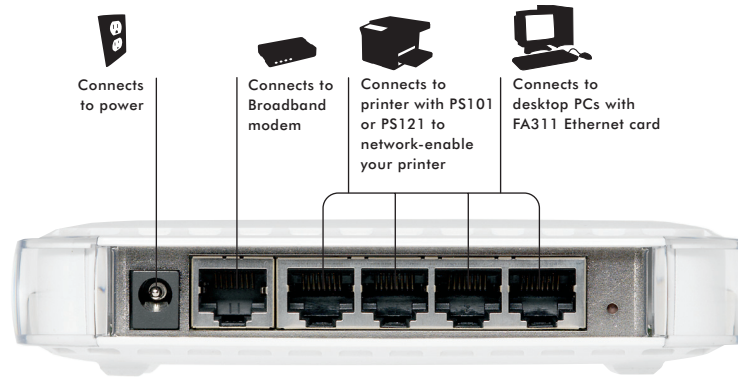

System Requirements

- Broadband (Cable, DSL) Internet service and modem with Ethernet connection
- Ethernet adapter and cable for each computer
- Windows® Vista™, XP, 2000 and other operating systems running a TCP/IP network
- Internet Explorer® 5.0 or Netscape® 4.7 or higher

Physical Specifications

- Dimensions (h x w x d): 28.6 x 147 x 95.7mm (1.1 x 5.8 x 3.8in)
- Weight: 0.45 lbs (0.20 kg)

Routing Protocols

- Static & Dynamic Routing with TCP/IP, VPN passthrough (IPSec, L2TP) NAT, UDP, RIP-1, RIP-2, PPTP, PPPoE, DNS, DHCP (client & server)

Application Support

- Works with most Internet gaming and instant messaging applications

Maintenance

- Save/Restore Configuration, Upgrades via Web Browser, Logging

Functions

- Port Range Forwarding, Exposed Host (DMZ), DNS Proxy, URL Content Filtering, E-mail alerts of Internet activity logs

Interface Specifications

- Internet/WAN: 10/100 Mbps (auto-sensing) Ethernet, RJ-45
- LAN: 4 ports 10/100 Mbps (auto-sensing) Ethernet, RJ-45

Firewall

- Stateful Packet Inspection (SPI), DoS Attack Detection/Logging, Dropped Packet Log, Security Event Log, E-mail log

Power Adapter

- 5.0 VDC, 1A; plug is localized to country of sale

Environmental Specifications

- Operating temperature: 32 to 104° F (0 to 40° C)
- Operating humidity: 90% maximum relative humidity, noncondensing

Warranty

- NETGEAR 2-year warranty

Package Contents

- Web Safe Router Gateway (RP614v4)
- Power adapter
- Ethernet cable
- Web Safe Router Resource CD
- Warranty/Support information card

NETGEAR Related Products

- Notebooks: Ethernet CardBus (FA511)
- Desktops: PCI Adapter (FA311)
- Network
 - 5 Port 10/100 Mbps Switch (FS605)
 - 8 Port 10/100 Mbps Switch (FS608)
 - 54 Mbps Wireless Access Point (WG602)
- Network Storage: Storage Central (SC101)
- Printers
 - Parallel-port Mini Print Server (PS101)
 - USB Mini Print Server (PS121)
- Gaming Consoles: Wall-plugged Ethernet Bridge (XE102)

NETGEAR®

4500 Great America Parkway
Santa Clara, CA 95054 USA
1-888-NETGEAR (638-4327)
E-mail: info@NETGEAR.com
www.NETGEAR.com

© 2007 NETGEAR, Inc. NETGEAR, the NETGEAR logo, Connect with Innovation, Everybody's connecting, the Gear Guy logo, IntelliFi, ProSafe, RangeMax and Smart Wizard are trademarks or registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Microsoft, Windows, and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice. All rights reserved.

*Free basic installation support provided for 90 days from date of purchase. Advanced product features and configurations are not included in free basic installation support; optional premium support available.

**Actual performance may vary due to operating conditions

D-RP614v4-0